

# INSTRUCCIONES DE MONTAJE PARA HONDA FORZA/SH 125 (2020)

REF: IT64104PRO



## PASO 1

Localizar la tapa del sistema de transmisión automático



## PASO 2

Retira la tapa del sistema de transmisión automático



## PASO 3

Retira la semi-polea del variador para liberar la correa



## PASO 4

Retira el variador original y los residuos de grasa, aceite o polvo



## PASO 5

Instala el variador J.Costa, respetando el orden de las arandelas del variador de origen y añade las propias de J.Costa



## PASO 6

Destensa la correa y colócala en su posición



## PASO 7


Instala la semi-polea y bloquea el variador



## PASO 8

Apreta el variador con llave dinamométrica con el par de apriete del fabricante


## DESPIECE DEL VARIADOR

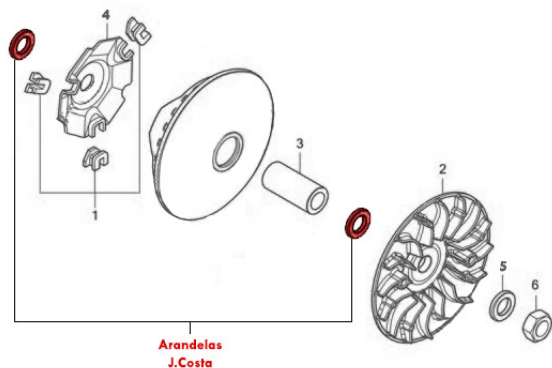

Arandelas J.Costa

## RECAMBIOS

CAMPANA: JC64104C  
MASAS: JC16025011012MB  
CASQUILLO: JC332525GI  
BULÓN: JC641S  
ARDELAS: JC641WS (x2)



(\*) Consumibles

## REFERENCIA MOTOR

**JK02E (2020)**

## PAR DE APRIETE

**6.0 Kg / 60 Nm**

## ⚠ ATENCIÓN ⚠

- El variador debe ser apretado únicamente mediante llave dinamométrica
- No añadir grasas, aceites o lubricantes para el montaje del variador J.Costa

# ASSEMBLY INSTRUCTIONS FOR HONDA FORZA/SH 125 (2020)

REF: IT64104PRO



## STEP 1



Identify the cover of the automatic transmission system

## STEP 2



Remove the cover of the automatic transmission system

## STEP 3



Remove the drive half-pulley from the variator to release the belt

## STEP 4



Remove the original drive and any grease, oil or dust residues.

## STEP 5



Install the J.Costa variator, respecting the order of the washers of the original variator and add the J.Costa washers

## STEP 6



Untighten the belt and place it in its correct position.

## STEP 7




Install the semi-pulley and lock the the variator

## STEP 8




Tighten the variator with torque wrench with the manufacturer's torque

## VARIATOR CUTTING

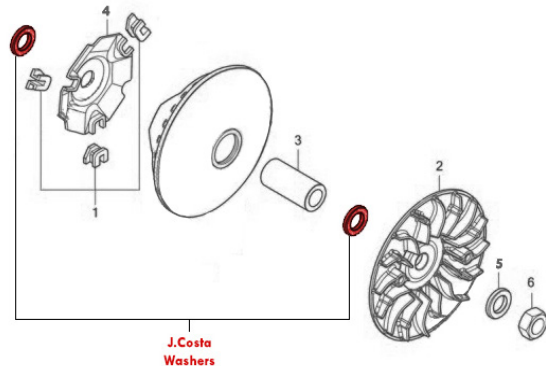

## SPARE PARTS

**BELL:** JC64104C  
**ROLLERS:** JC16025011012MB  
**BUSHING:** JC332525GI  
**SLIDER:** JC641S  
**WASHERS:** JC641WS (x2)



## ENGINE REFERENCE

**JK02E (2020)**

## TIGHTENING TORQUE

**6.0 Kg / 60 Nm**



**ATTENTION**



- The variator must only be tightened with a torque wrench.  
- Do not add grease, oil or lubricants for the assembly of the J.Costa variator.